

HEMA

Fertilizer Grapple Type GG 50-90

HEMA Fertilizer Grapple GG 90-550

The fertilizer grapples are designed for a working pressure of 170-200 bar, making them applicable for almost all types of auto cranes and machines.

The HEMA fertilizer grapple is mounted on a service and maintenance-friendly hydraulic top which is easily changeable.

All moving points are equipped with lubrication and replaceable bearings, which will make any potential repair easy, fast and affordable.



The grapple opens up so that the tips are completely vertical, thus making it easier to get into the often difficult mass, such as manure, crop etc.

In addition to the standard models, the fertilizer grapple is delivered with individual adjustment of teeth in terms of design and amount, depending on what material it is intended for.

The grapple comes with individually adjustable bolt mounted suspensions for rotators with shafts.

The horizontal and well-protected cylinder provides an extra low construction height, big closing force and a quick opening time.

For mounting on cranes and machines with a working pressure over 200 bar, the grapple can be supplied with a reduction valve.

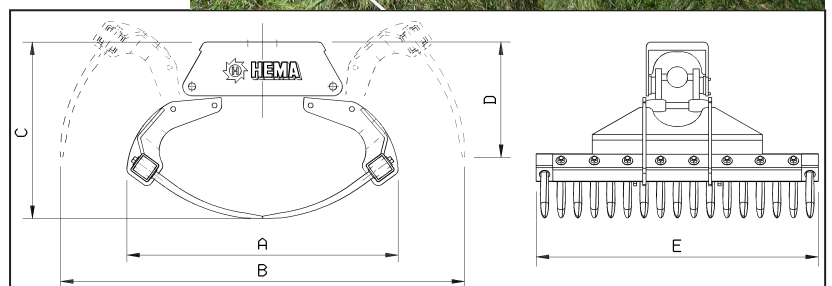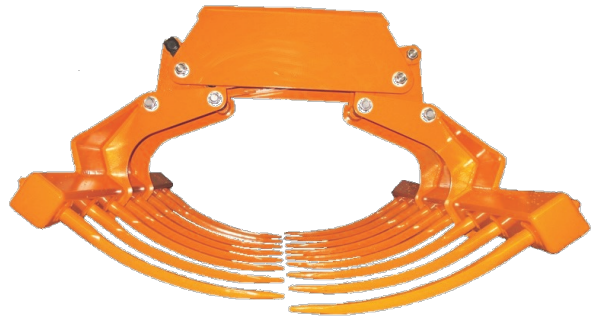

Product nr.	TYPE	Bar	Contents	A mm	B mm	C mm	D mm	E mm	Weight kg
3015 5585	GG 90-550	200	550 L	1268	1941	848	550	1380	345
3015 5590	GG 90-650	200	650 L	1308	1948	848	550	1600	350